


Digitron

HLX500 GPRS

Remote Real-Time monitor Temperature & Humidity Data Logger

HLX 500 GPRS Remote Real-Time monitor Temperature & Humidity Data Logger

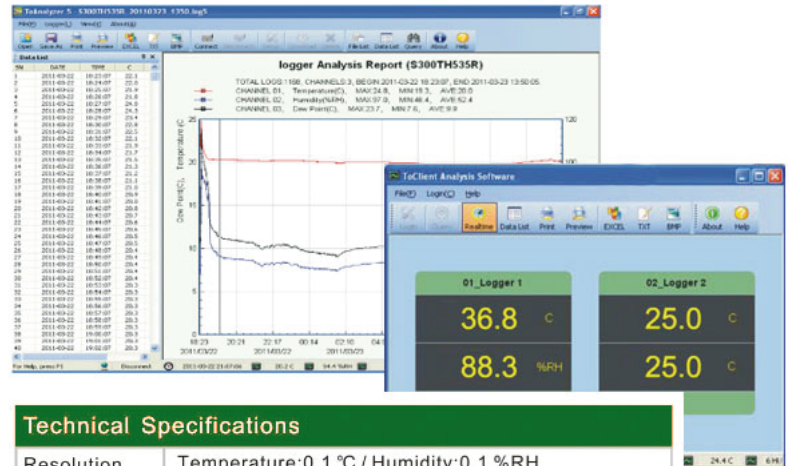

Technical Specifications	
Resolution	Temperature:0.1 °C / Humidity:0.1 %RH
Frequency Range	GSM 850 / 900 / 1800 / 1900MHz
Power supply	9V block battery and 9V DC
Display	LCD display
Dimension	135mm×124mm×35mm(5.31"×4.88"×1.37"inch)
LCD size	97mm×78mm (3.81"×1.37"inch)
Weight	380g
Accessories	PC-Software, data cable, 9V block battery, screw, user manual, AC-DC adapter and carrying box.
Interface	USB

The high measurement accuracy (0.2 ~ 0.5° / 2 ~ 5% RH).

Large storage capacity.(65000)

Large LCD screen, temperature and humidity data at the same time, intuitive and clear.

The built-in sound and light alarm, exceeds a set limit to send alarm information to specify the user's mobile phone.

User phone dialing query data. Location without time limit, the control site data changes at any time.

Model List							
Model	S500-EX-GSM	S500-ET-GSM	S500-DT-GSM	S520-EX-GSM	S520-ET-GSM	S520-DT-GSM	S580-EX-GSM
Temperature Accuracy	±0.5°C	±0.5°C	±0.5°C	±0.3°C	±0.3°C	±0.3°C	±0.2°C
Humidity Accuracy	±5%RH	/	/	±3%RH	/	/	±2%RH
Sensor type	External						
Record Volume	65000						
Measurement Range	-40~85°C / 0~100%RH						