

# Digitron

## HLX07 Series

### Interchangeable Humidity / Temperature Transmitter for OEM Applications

alterations according to customer specifications possible

The compact HLX07 humidity and temperature probe is based on a new electronic concept in combination with the miniaturized SMD humidity sensor element HC105 series.

A wide humidity and temperature working range, small dimensions of the polycarbonate or metal housing and appropriate filters allow for the use in a large variety of applications.

Calibration data and other measurement relevant functions (e.g. linearization or temperature compensation) are stored in the electronics, integrated in the probe. In combination with the M12 connector, replacement in seconds without readjustment of the evaluation electronics is guaranteed.

The digital output signal allows for easy processing of the measurement results and cost efficient interfacing to customers electronics.



#### Typical Applications

humidifiers and dehumidifiers  
 meteorological applications  
 climate and ventilation control  
 snowguns  
 OEM applications

#### Features

digital output  
 fast interchangeable  
 very small dimensions  
 highest accuracy  
 traceable calibration  
 easy interfacing to microcontroller

#### Technical Data

##### Measuring values

###### Relative Humidity

Sensor element HC105  
 Digital output (2 wire)<sup>1)</sup>  
 Working range<sup>2)</sup> 0...100% RH  
 Accuracy incl. hysteresis and nonlinearity ±2% RH (0...90% RH) ±3% RH (90...100% RH)


Temperature dependence Traceable to intern. standards, administrated by NIST, PTB, BEV...

###### Temperature

Sensor element Pt1000 (tolerance class A, DIN EN 60751)  
 Digital output (2 wire)<sup>1)</sup>  
 Accuracy (at 20°C: ±0,1°C)

output value: 0.00...100.00% RH  
 $< (0.025 + 0.0003 \times RH) \left[ \frac{\% RH}{^{\circ}C} \right]$

output value: -40.00...+80.00°C (-40...176°F)

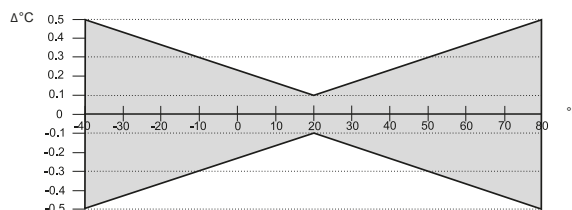

##### General

Supply voltage 3.8V DC - 5.5V DC  
 Current consumption < 1.5mA  
 Housing polycarbonate or stainless steel / IP65  
 Sensor protection membrane filter, PTFE filter, metal grid filter (polycarbonate), metal grid filter (stainless steel)

Electromagnetic compatibility<sup>3)</sup> EN 61326-1

Temperature range EN 61326-2-3

max. cable length<sup>4)</sup> 30m (98.4ft)

1) serial protocol

3) HLX07 is not protected against surge

working temperature: -40...80°C (-40...176°F)


storage temperature: -40...60°C (-40...140°F)

2) refer to the working range of the humidity sensor HC105


4) dependent on selected Bus frequency

CE

### Metal housing HLX07-MFTx

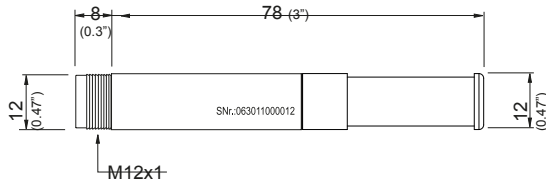


### Polycarbonate housing HLX07-PFTx

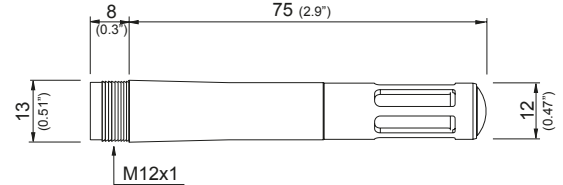


## Connection Diagram

### HLX07:



- 1...GND
- 2...+UB
- 3...DATA
- 4...CLOCK

### M12x1 flange coupling with 50mm (2") litz wire (HA010705):

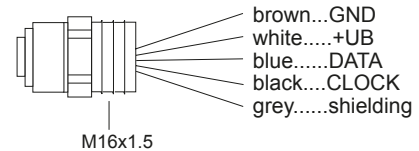


## Ordering Guide

HOUSING	MODEL	FILTER	COATING
metal (M)	humidity and temperature (FT)	membrane filter (1)	without (no code)
polycarbonate (P)		PTFE filter (5)	with (HC01)
		metal grid filter (polycarbonate) (6)	
		metal grid filter (stainless steel) (9)	
<b>HLX07-</b>			

## Accessories

- E2 interface - RS232 converter: (HA011001)  
For first testing measurements by a PC is a RS232 converter available
- M12x1 flange coupling with 50mm (2") litz wire (HA010705)
- filter caps (HA0101xx)
- radiation shield (HA010502)



E2 interface - RS232 converter

## Order Example

### HLX07-PFT6

- Housing: polycarbonate
- Model: humidity and temperature
- Filter: metal grid filter (polycarbonate)